

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number
WO 2005/039659 A1

(51) International Patent Classification⁷: A61L 9/20,
9/16, F24F 3/16, A61L 9/22

(74) Agent: IEMENSCHOT, J., A.; Exter Polak & Charlouis
B.V., P.O. Box 3241, NL-2280 GE Rijswijk (NL).

(21) International Application Number:
PCT/NL2004/000752

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(22) International Filing Date: 26 October 2004 (26.10.2004)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
PCT/NL03/00730 27 October 2003 (27.10.2003) NL
PCT/NL04/000209 26 March 2004 (26.03.2004) NL

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(71) Applicant and
(72) Inventor: SILDERHUIS, Hermannus, Gerhardus,
Maria [NL/NL]; 9a, Groot Tegeler, NL-7535 EB En-
schede (NL).

[Continued on next page]

(54) Title: AIR TREATMENT METHOD AND DEVICE

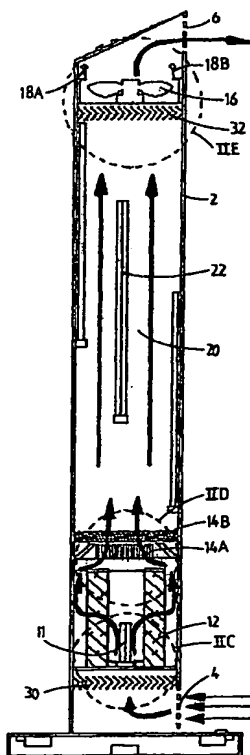

(57) Abstract: To improve the air quality in bounded spaces such as a room, an air treatment device and an air treatment method are disclosed. The air treatment device comprises a fan (16) for stimulating airflow through the air treatment device and an UV treatment chamber (20). An UV radiation source (11) radiates UV radiation in the UV treatment chamber to kill microorganisms in said airflow. The air treatment device is designed such that a high airflow may be generated, while all microorganisms present in the air flowing through the air treatment device are killed. With the high airflow and air cleaning capacity, the air treatment device may clean a bounded space in a short period of time.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report